


## SB, Blade arms adjusting, BG trowels, all variants, 2025-06

*This bulletin is for information only and does not require any actions.*

### Instruction on how to adjust BG trowels blade arms

1. Assemble the blade arms, blades, shoulder height adjusting screws, and their jam nuts into the blade hub. Place the assembled blade hub on a fully flat surface. Put a height gauge on the top surface of the blade hub.

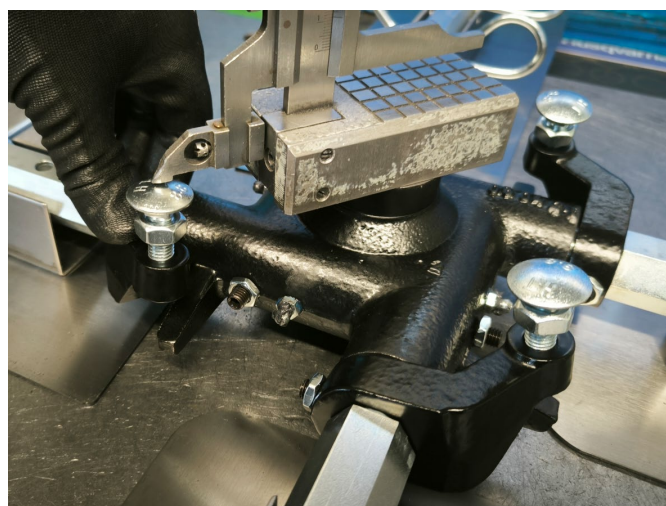

2. Press and hold the blade arm shoulder to remove the clearances. Adjust the screws to be on equal height.



3. Put the pressure plate on top of the screws to check if all of them are in contact with the pressure surface.
4. To get the best results in trowel performance, the height of the height adjustment screws should be approximately as shown in the table:

Model	Height, mm.
BG 244/245	23
BG 375	11
BG 475/479	6
BG 375 US line	5
BG Combi 850	11
BG Combi 1050	11

**Revision History**

Rev.	Date	Order id.	Description
A	2025-06	00176414	Created